



1	2	3	4	5	6	7	8	9	10	11	12	13
/CS1	RES	A0	/MR	/RD	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7
14	15	16	17	18	19	20	21	22	23	24	25	26
VDD	VSS	VOUT	CAP3	CAP1+	CAP1-	CAP2-	CAP2+	V1	V2	V3	V4	V5

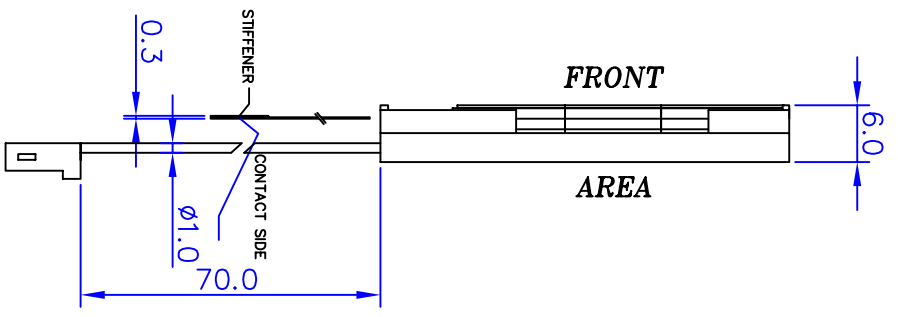

- NOTES:
- 1.DISPLAY TYPE: STN/GREY
  - 2.VIEWING ANGLE: 6:00
  - 3.POLARIZER MODE: TRANSPARENTIVE/POSITIVE
  - 4.OPERATING TEMP: -30°C~~+80°C
  - 5.STORAGE TEMP: -40°C~~+90°C
  - 6.LOGIC VOLTAGE: VDD=3.0V
  - 7.LCD DRIVER VOLTAGE: Vop=10.5V
  - 8.DRIVE METHOD: 1/65DUTY,1/9BIAS
  - 9.DRIVE IC: SPLC501C
  - 10.BACKLIGHT TYPE: LED/WHITE

DESCRIPTION

DRAW NO. YMSG-G12864P-23DGSWHN DRAWN ME CHECKED EE CHECKED APPROVED

UNIT:mm PAGE:1/1 VER: A SCALE:1/1

DATE TOLERANCES UNLESS:

深圳市耀宇科技有限公司  
SHENZHEN YAO YU TECHNOLOGY CO., LTD.