


已确认此版本的所有图纸

签名: _____ 日期: _____

REV.	DESCRIPTION	DATE
A	REV. A.A.SIZE	06/12/2005
B	REV. PIN PITCH	08/12/2005
C	ADD SCREEN	03/01/2006
D	REV.SILK-SCREEN	10/01/2006

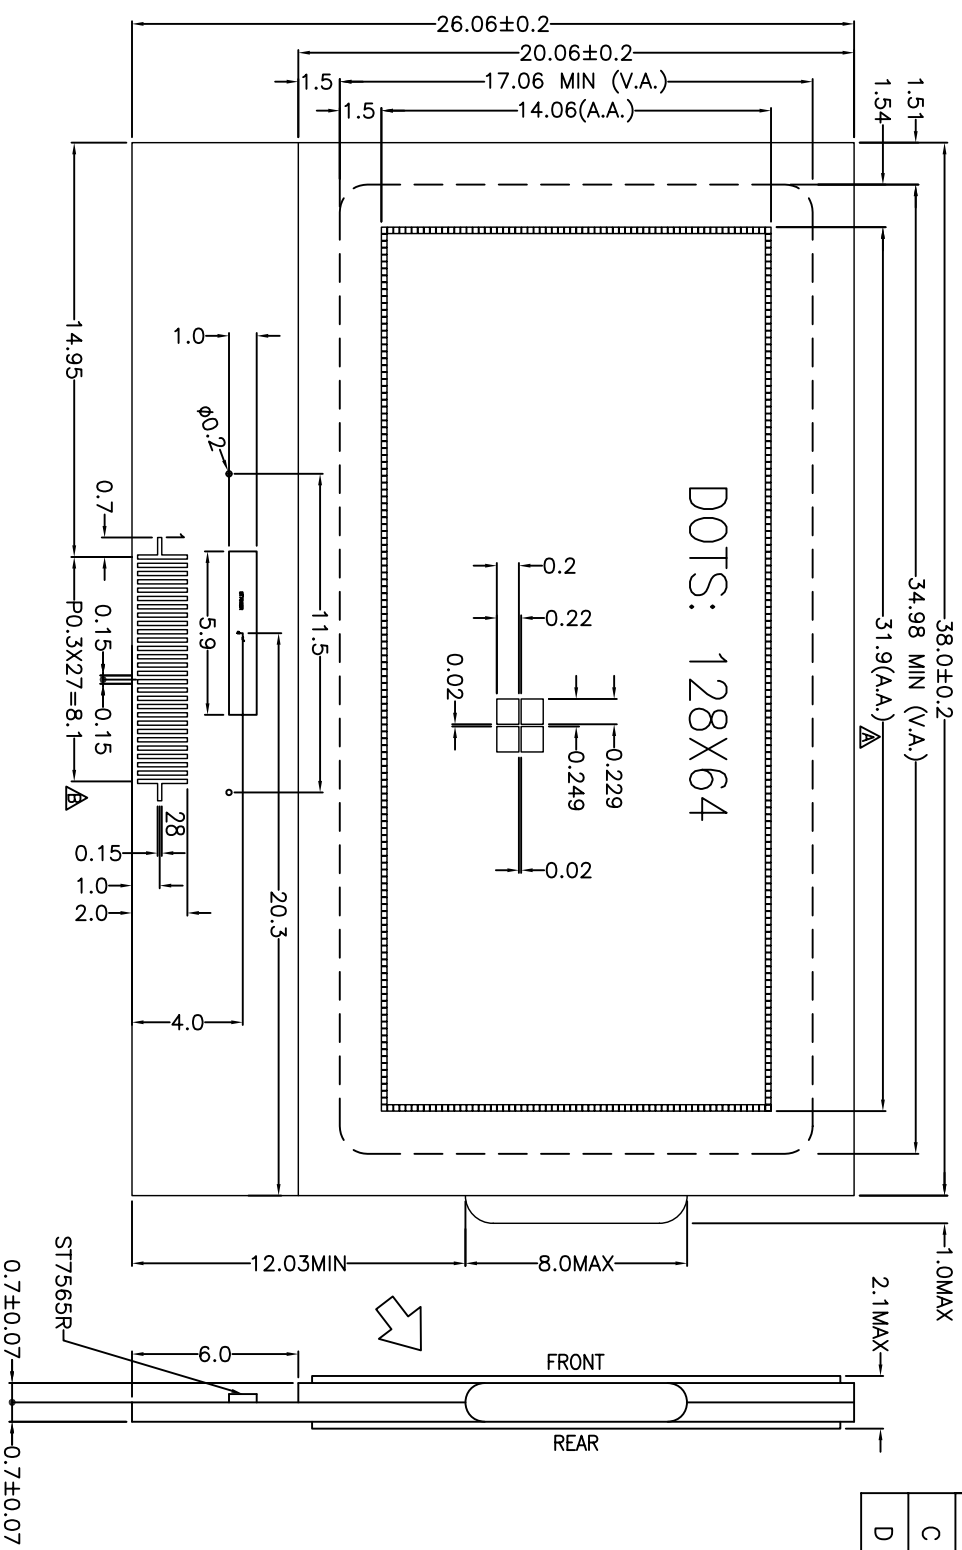

SPECIFICATIONS

DISPLAY MODE : FSTN , NEGATIVE MODE
 DRIVE CONDITION : 1/64 DUTY , 1/9 BIAS
 VIEWING DIRECTION : 6 O'CLOCK
 OPERATING TEMP : -20°C TO +70°C
 STORAGE TEMP : -30°C TO +80°C
 OPERATING VOLTAGE: 7.8 V
 FRONT POLARIZER : TRANSMISSIVE,ADHESIVE
 BACK POLARIZER : TRANSMIAAIVE,ADHESIVE
 CUSTOMER NO.: PTM12864K41
 CONNECTORS : COG/FPC

VIEWING DIRECTION

Yaoyu Technology Co.,Ltd

GENERAL TOL	ALL UNITS:	DATE	MODEL NUMBER :	SHEET:
0.20	mm	03/12	YM12864P-26	1 OF 2
DWN: ZHANG				DATE:
CHK:				03-12-2005
APP:		DO NOT SCALE THIS DRAWING.	PROJECTION	