
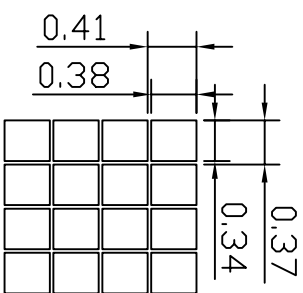


LCD TYPE	STN/YELLOW-GREEN/POSITIVE
VIEW ANGLE	12:00
REAL POLARIZER	TRANSFLECTIVE
OPERATING TEMP	-20°C ~ +70°C
STORAGE TEMP	-30°C ~ +80°C
OPERATING VOLTAG	3.0V or 3.3V
LCD DRIVER VOLTAGE	9.0V

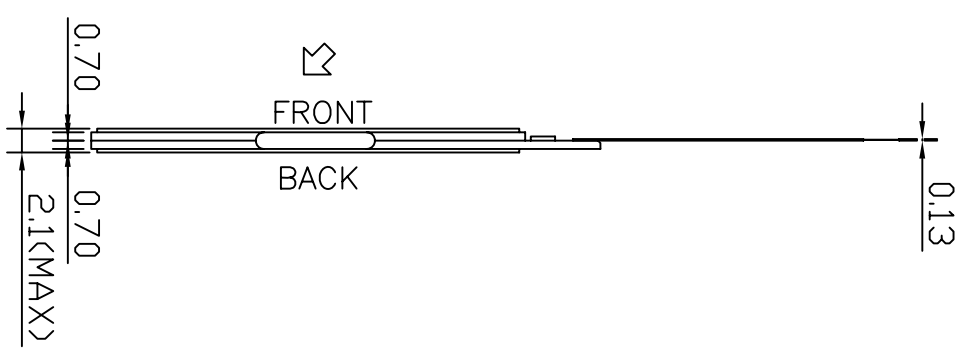

DETAIL FOR DOTS
SCALE 10:1

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14
DESC	CS1B	RESET	RS	RV	E	D0	D1	D2	D3	D4	D5	D6	D7	VDD
PIN	16	17	18	19	20	21	22	23	24	25	26	27	28	29
DESC	VOUT	C4+	C3+	C1-	C1+	C2+	C2-	V1	V2	V3	V4	V0	C68	PS