

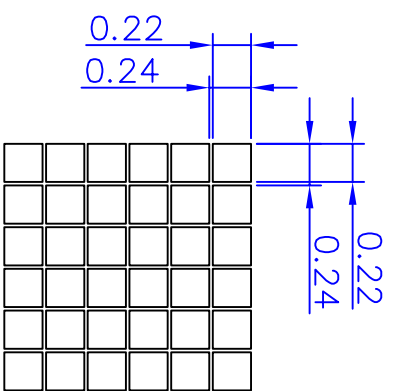


DESCRIPTION	DATE
XXXXXX	19-01-08

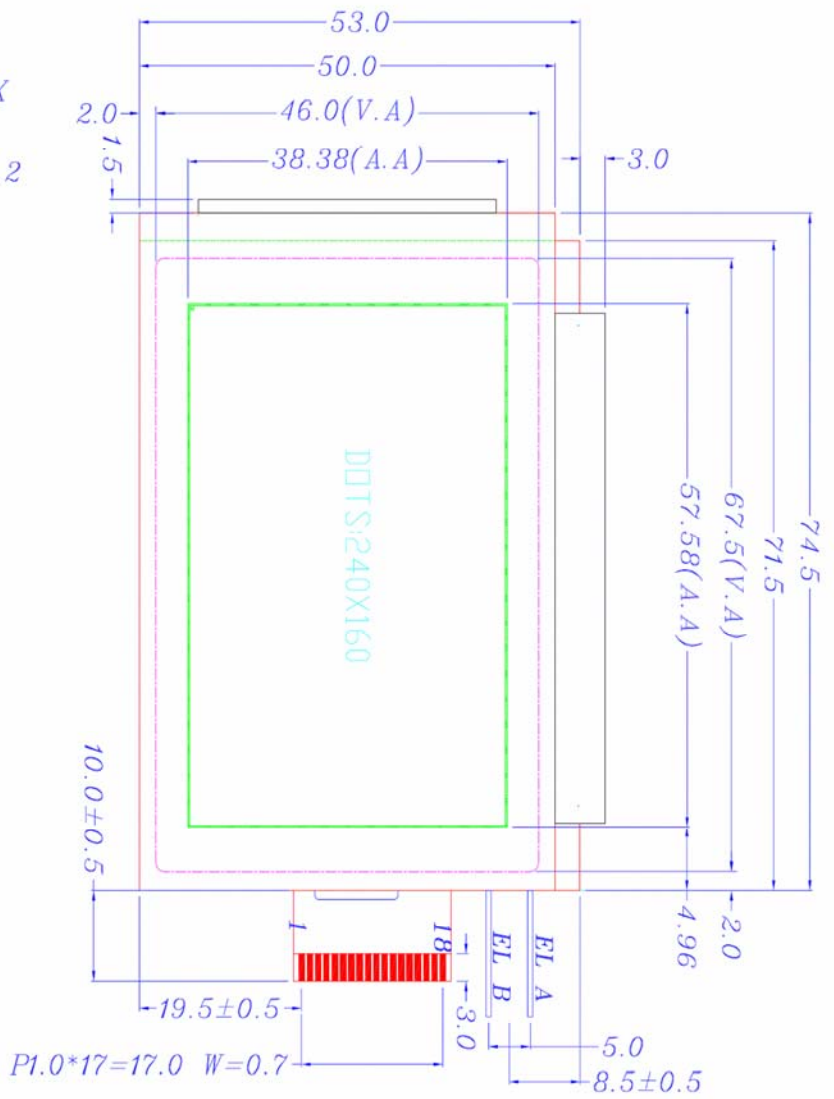


SCALE: 20/1

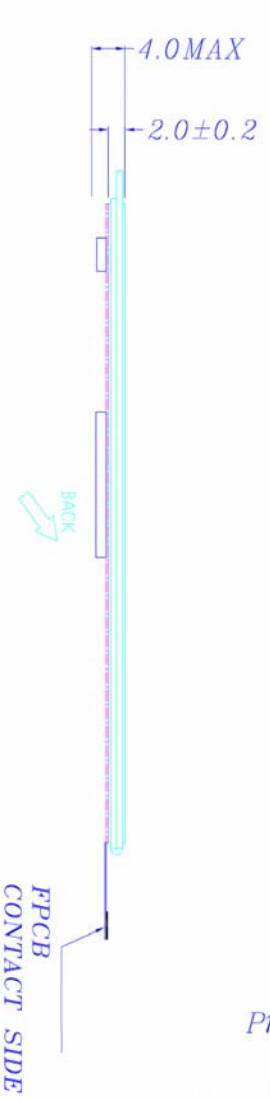

- NOTES:
- 1.DISPLAY TYPE: FSTN
 - 2.VIEWING ANGLE: 6:00
 - 3.POLARIZER MODE: TRANSPARENT/POSITIVE
 - 4.OPERATING TEMP: -20°C~+70°C
 - 5.STORAGE TEMP: -30°C~+80°C
 - 6.LOGIC DRIVER VOLTAGE: VDD=3.3V
 - 7.LCD DRIVER VOLTAGE: ---
 - 8.DRIVE METHOD: 1/160DUTY,1/14BIAS
 - 9.DRIVE IC: NT7701,NT7702
 - 10.BACKLIGHT TYPE: EL/BLUE-GREEN

1	2	3	4	5	6
V4	V1	V0	VDD	EI01	VSS
7	8	9	10	11	12
LP	VSS	FR	/DISP	XCK	V3
13	14	15	16	17	18
V2	D4	D3	D2	D1	NC



深 圳 市 耀 宇 科 技 有 限 公 司
SHENZHEN YAO YU TECHNOLOGY CO., LTD.

DRAW NO.	YMFT-C240160A-2DPFBSN	DRAWN	ME CHECKED	EE CHECKED	APPROVED
UNIT:mm	PAGE:1/1 VER: A SCALE:1/1				
	TOLERANCES UNLESS:				

- 1.DISPLAY TYPE:
- 2.VIEWING ANGLE:
- 3.POLARIZER MODE:
- 4.OPERATING TEMP:
- 5.STORAGE TEMP:
- 6.LOGIC DRIVER VOLTAGE:
- 7.LCD DRIVER VOLTAGE:
- 8.DRIVE METHOD:
- 9.DRIVE IC:
- 10.BACKLIGHT TYPE: