




DESCRIPTION	DATE
XXXXXXXX	28-12-07

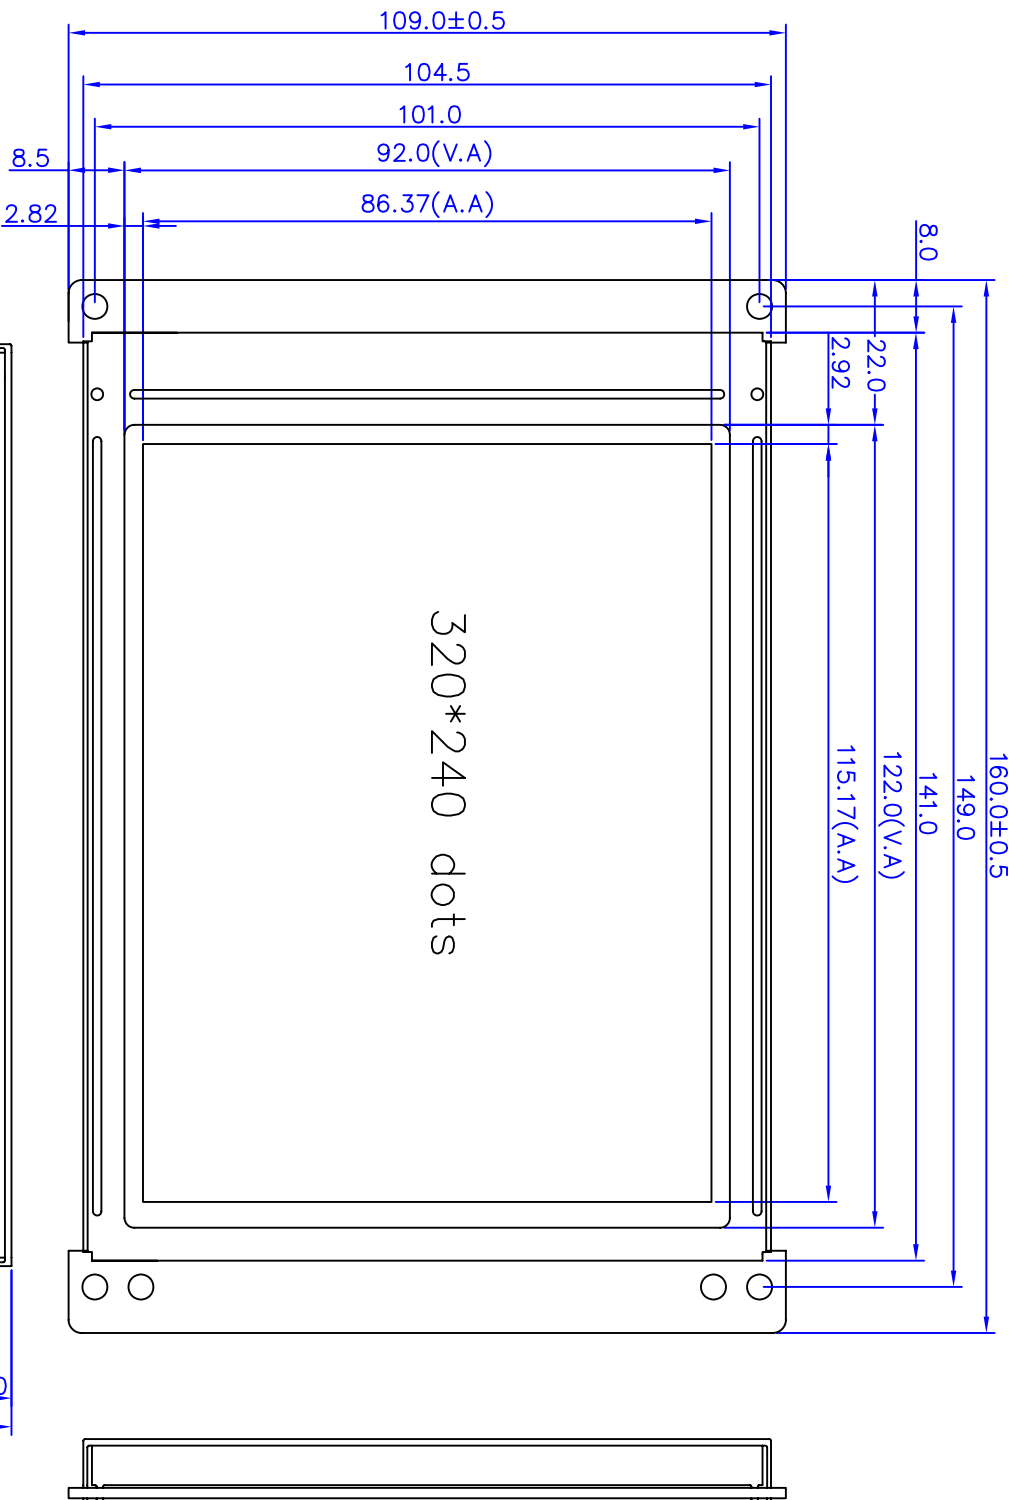

- NOTES:
- 1.DISPLAY TYPE:
 - 2.VIEWING ANGLE:
 - 3.POLARIZER MODE:
 - 4.OPERATING TEMP:
 - 5.STORAGE TEMP:
 - 6.LOGIC VOLTAGE:
 - 7.LCD DRIVER VOLTAGE:
 - 8.DRIVE METHOD:
 - 9.DRIVE IC:
 - 10.BACKLIGHT TYPE:

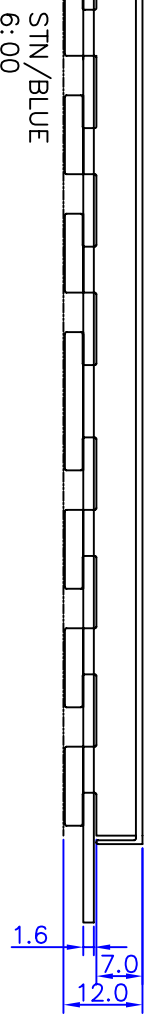

320*240 dots



ON1 P=1.0mm


1	2	3	4	5	6	7	8	9	10	11	12
/MS	/RD	/MR	/CS	A0	D0	D1	D2	D3	D4	D5	D6
13	14	15	16	17	18	19	20	21	22	23	24
D7	VDD	VSS	VEE	Vadj	NC	NC	NC	NC	NC	LED-	LED+

ON2 P=1.25mm

1	2	3	4	5	6	7	8
DB0	DB1	DB2	DB3	/DOF	FLM	M	LP
9	10	11	12	13	14	15	16
CP	VDD	VSS	VEE	Vadj	FGND	LED+	LED-

ON3 P=1.0mm

1	2	3	4	5	6	7	8
DB0	DB1	DB2	DB3	/DOF	FLM	M	LP
9	10	11	12	13	14	15	16
CP	VDD	VSS	VEE	Vadj	FGND	LED+	LED-

 深 圳 市 耀 宇 科 技 有 限 公 司 SHENZHEN YAO YU TECHNOLOGY CO., LTD.		DRAW NO. YM320240B-06 UNIT:mm TOLERANCES UNLESS:	PAGE:1/1 VER: A SCALE:1/1	DRAWN ME CHECKED EE CHECKED APPROVED
--	--	--	---------------------------------	---