



DESCRIPTION	DATE
XXXXXXXX	21-01-08

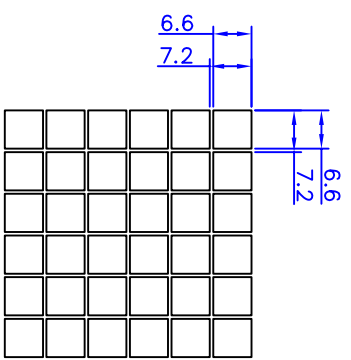

SCALE: 20/1

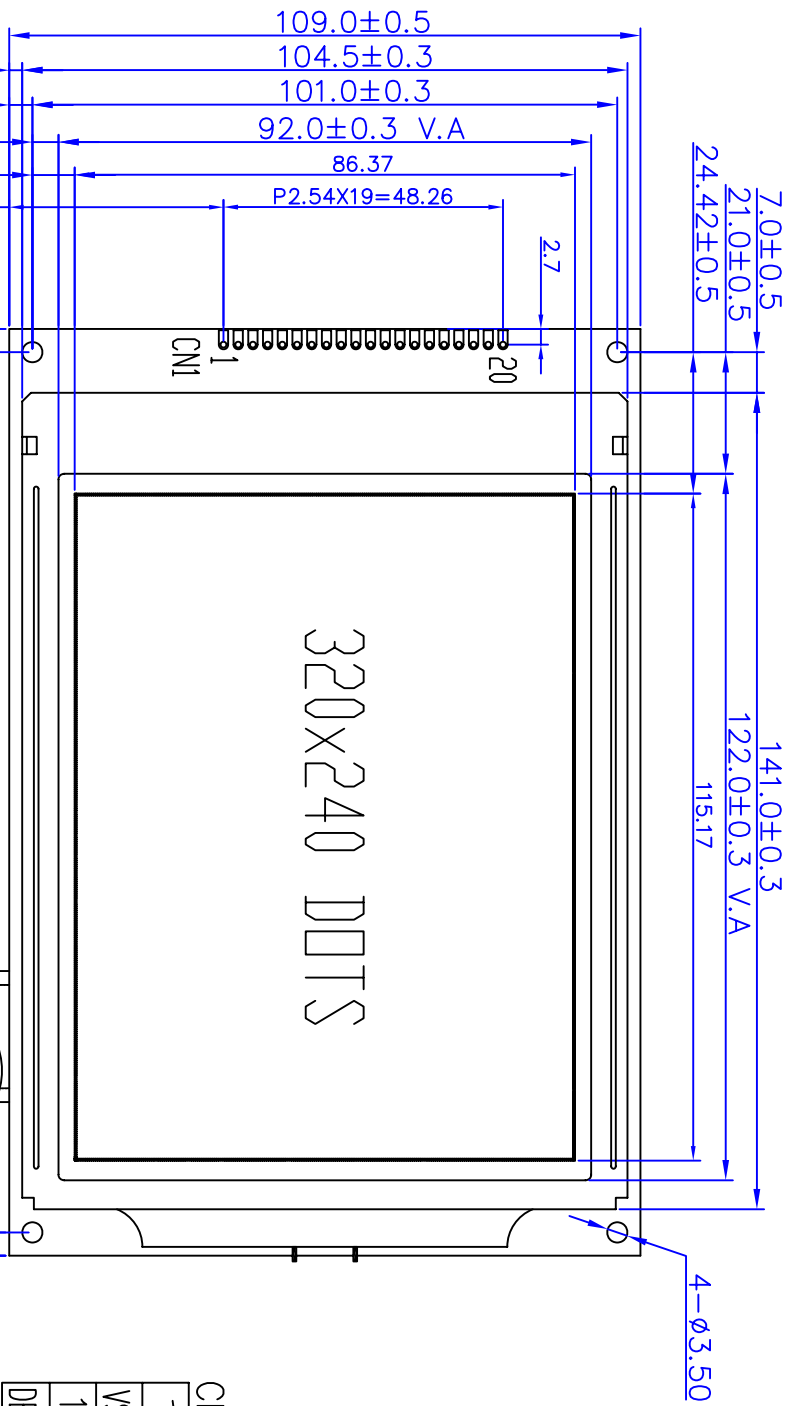

CN1

1	2	3	4	5	6	7	8	9	10
VSS	VDD	V0	NC	NC	/CS	A0	RST	DB0	DB1
11	12	13	14	15	16	17	18	19	20
DB2	DB3	DB4	DB5	DB6	DB7	NC	WUIT	LEDA	LEDK

CN2

1	2	3	4	5	6	7	8	9	10	11
VSS	VDD	V0	A0	NC	NC	DB0	DB1	DB2	DB3	DB4
12	13	14	15	16	17	18	19	20	21	22
DB5	DB6	DB7	/CS	RST	WUIT	SEL	NC	NC	NC	NC

CN3

1	2	3	4	5	6	7	8	9	10	11	12	13	14
D0	D1	D2	D3	DISP	FLM	M	CL1	CL2	VDD	VSS	WUIT	V0	NC

- NOTES:
- 1.DISPLAY TYPE:
 - 2.WEING ANGLE:
 - 3.POLARIZER MODE:
 - 4.OPERATING TEMP:
 - 5.STORAGE TEMP:
 - 6.LOGIC VOLTAGE:
 - 7.LCD DRIVER VOLTAGE:
 - 8.DRIVE METHOD:
 - 9.DRIVE IC:
 - 10.BACKLIGHT TYPE:

STN/BLUE
6:00
TRANSFLECTIVE/POSITIVE
-20°C~+70°C
-30°C~+80°C
VDD=5.0V

1/240DUTY,1/17BIAS
SED13305FOA
LED/WHITE

深圳市耀宇科技有限公司
SHENZHEN YAO YU TECHNOLOGY CO., LTD.

DRAW NO.	YMS20240A-3	DRAWN	ME CHECKED	EE CHECKED	APPROVED
UNIT:mm	PAGE:1/1	VER: A	SCALE:1/1		
	TOLERANCES UNLESS:				