



ON1:
 1 2 3 4 5 6 7 8 9 10 11 12
 AVSS AVDD VSS VDD VO RS R/W E CSI CS2 BUSY INT
 13 14 15 16 17 18 19 20 21 22 23 24
 /RST DB0 DB1 DB2 DB3 DB4 DB5 DB6 DB7 VOUT LEDA LEDK

ON3:

1	2	3	4
X1	Y1	X2	Y2

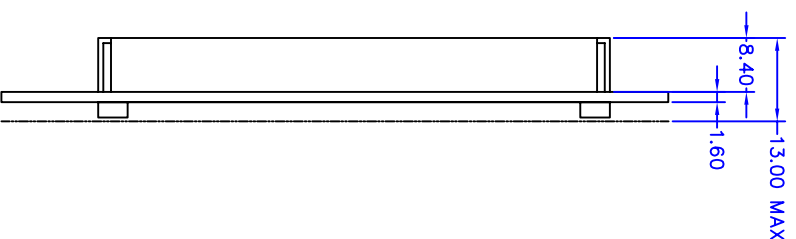

SCALE:10/1

- NOTES:
- 1.DISPLAY TYPE: FSTN
 - 2.VIEWING ANGLE: 6:00
 - 3.POLARIZER MODE: TRANSPARENT/POSITIVE
 - 4.OPERATING TEMP: -20°C ~ +70°C
 - 5.STORAGE TEMP: -30°C ~ +80°C
 - 6.LOGIC VOLTAGE: VDD=5.0V
 - 7.LCD DRIVER VOLTAGE: Vop=---
 - 8.DRIVE METHOD: 1/128DUTY 1/12BIAS
 - 9.DRIVE IC: RA8803PIN-S
 - 10.BACKLIGHT TYPE: WHITE LED

ON2:

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
K00	K01	K02	K03	K04	K05	K06	K07	K10	K11	K12	K13	K14	K15	K16	K17

1	2	3	4	5	6	7	8	9	10	11	12
AVSS	AVDD	VSS	VDD	VO	RS	R/W	E	CSI	CS2	BUSY	INT
13	14	15	16	17	18	19	20	21	22	23	24
/RST	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	VOUT	LEDA	LEDK



深圳市耀宇科技有限公司
 SHENZHEN YAO YU TECHNOLOGY CO., LTD.

DRAW NO.	YMFP-G240128YDPSWSD	DRAWN/ME	CHECKED	EE	CHECKED	APPROVED
UNIT:mm	PAGE:1/1 VER:A SCALE:1/1					
	TOLERANCE UNLESS:±0.2					