
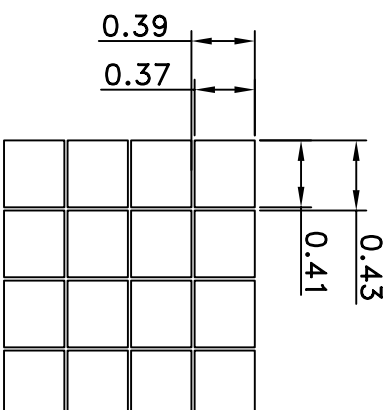


PINNO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
SIGNAL	VDD	/RES	AO	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	VDD	VSS
PINNO.	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
SIGNAL	Vo <sub>ut</sub> CAP3-	CAP1+	CAP1-	CAP2-	CAP2+	V1	V2	V3	V4	V5	VR	VDD	IRS	VDD	VDD

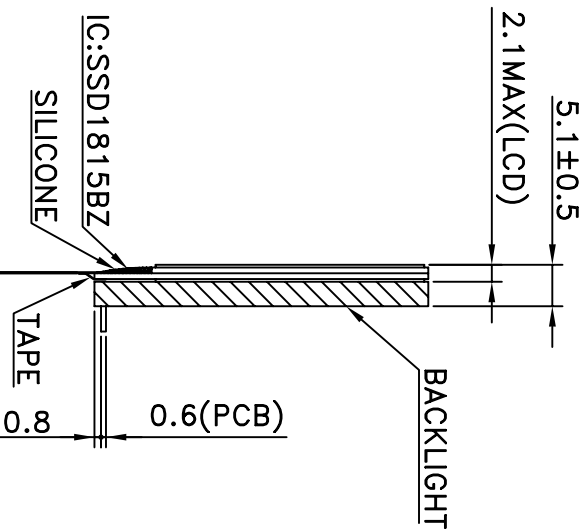

DOTS SCALE:20/1

CONDUCTOR

STIFFENER

NOTES:

- 1.DISPLAY TYPE: STN/YELLOW-GREEN
- 2.VIEWING ANGLE: 12:00
- 3.POLARIZER MODE:TRANSFLECTIVE/POSITIVE
- 4.OPERATING TEMP: -20°C ~ +70°C
- 5.STORAGE TEMP: -30°C ~ +80°C
- 6.LOGIC VOLTAGE: VDD=3.0V
- 7.LCD DRIVER VOLTAGE: Vop=9.8V
- 8.DRIVE METHOD: 1/64DUTY 1/7BIAS
- 9.DRIVE IC: SSD1815BZ
- 10.BACKLIGHT TYPE: YELLOW-GREEN EDGE LED



深圳市耀宇科技有限公司  
SHENZHEN YAO YU TECHNOLOGY CO., LTD

DRAW NO. YMSG-G12864P-3DYSSYN

DRAWN

ME CHECKED EE CHECKED

APPROVED

UNIT:mm


PAGE:1/1 VER: B SCALE:1/1

REV. DESCRIPTION DATE

CHANGE THE NOTE

DESCRIPTION

DATE



TOLERANCES UNLESS:±0.1