




PIN ASSIGNMENT

PIN NO.	1	2	3	4	5	6	7	8	9
SIGNAL	V4	V1	VO	VDD	FRM	VSS	LP	VSS	M
PIN NO.	10	11	12	13	14	15	16	17	18
SIGNAL	NC	CP	V3	V2	D3	D2	D1	D0	NC

TOUCH PANEL:

PIN NO.	1	2	3	4
SIGNAL	YU	XR	YD	XL

 深圳市耀宇科技有限公司 SHENZHEN YAO YU TECHNOLOGY CO., LTD						
DRAW NO.	YMFT-G320240E-1DPEWSD	DRAWN	ME CHECKED	EE CHECKED	APPROVED	
UNIT:mm	PAGE:1/2	VER: A	SCALE:1/1			
REV.	DESCRIPTION	DATE	 TOLERANCES UNLESS:±0.3			

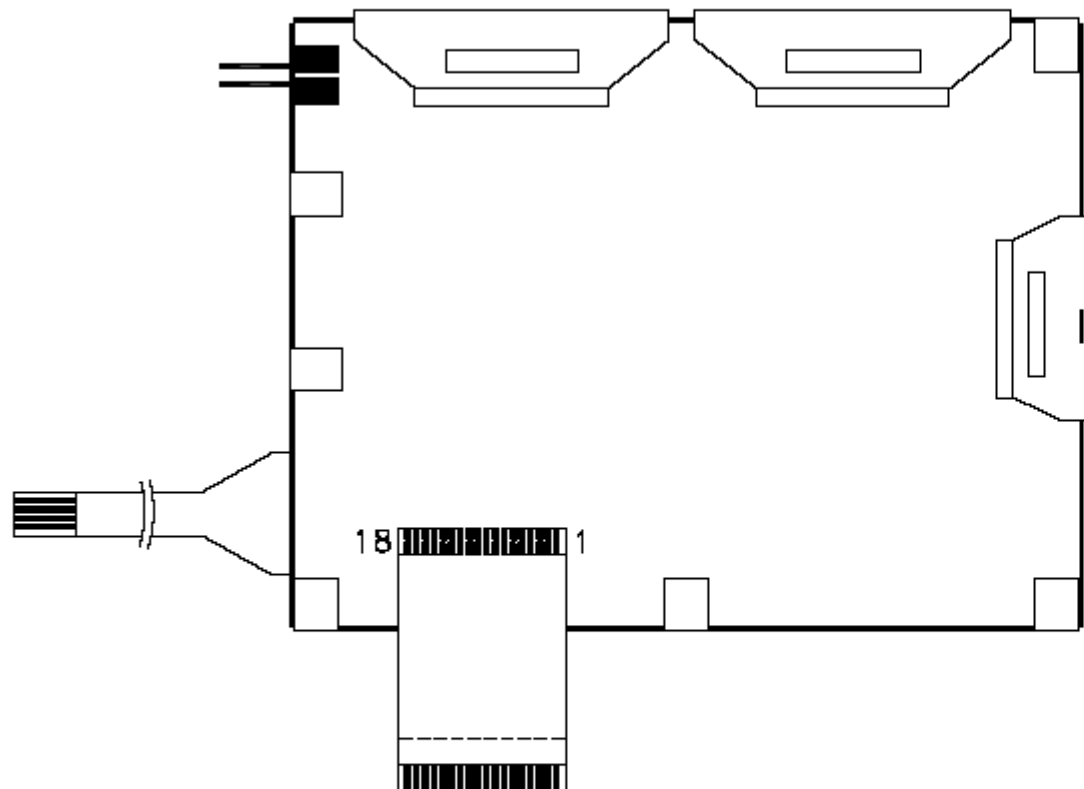

BOTTOM SIDE

NOTES:

- 1.DISPLAY TYPE: FSTN
- 2.VIEWING ANGLE: 6:00
- 3.POLARIZER MODE:TRANSMISSIVE/POSITIVE
- 4.OPERATING TEMP: -20°C ~ +70°C
- 5.STORAGE TEMP: -30°C ~ +80°C
- 6.LOGIC VOLTAGE: VDD=5.0V
- 7.LCD DRIVER VOLTAGE: $V_{op}=21.5V$
- 8.DRIVE METHOD: 1/240DUTY 1/17BIAS
- 9.DRIVE IC:NT7701 NT7702
- 10.BACKLIGHT TYPE: WHITE EL
- 11.FRAME thickness=0.2MM

Material: stainless steel



深圳市耀宇科技有限公司
SHENZHEN YAO YU TECHNOLOGY CO., LTD

			DRAW NO.	YMFT-G320240E-1DPEWSD	DRAWN	WE CHECKED	EE CHECKED	APPROVED
			UNIT:mm	PAGE:2/2	VER: A	SCALE:1/1		
REV.	DESCRIPTION	DATE	TOLERANCES UNLESS:±0.3					