
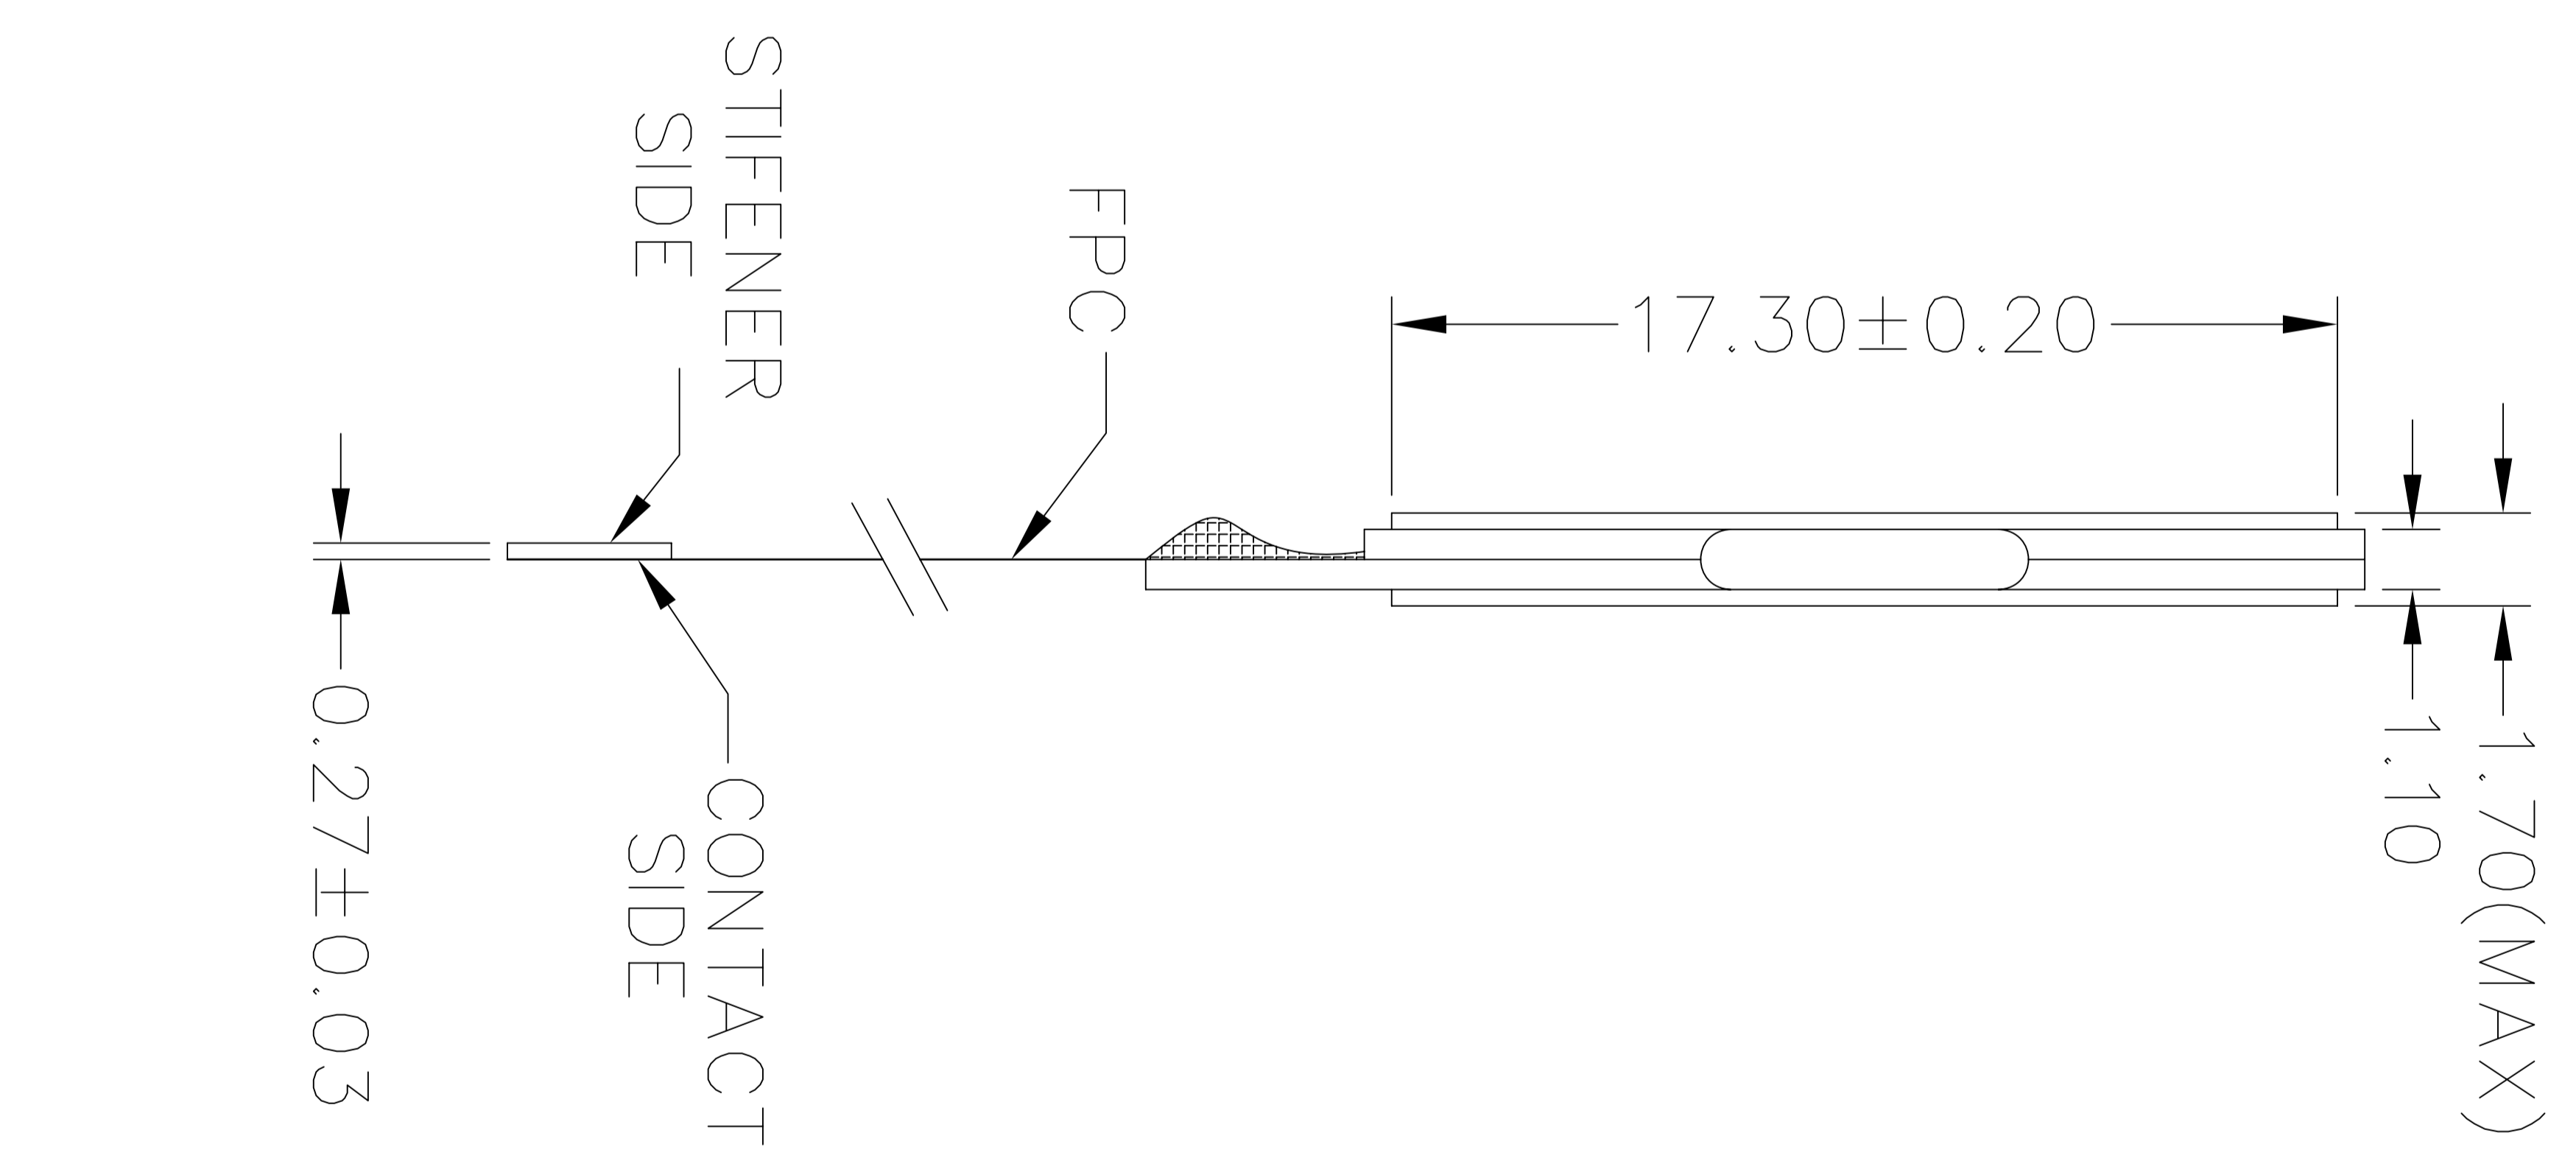



REV.	DESCRIPTION OF MODIFY	MODIFY BY:	DATE
A0	1'ST,DESIGN	/	/
A1	Modif. FPC	WEN	2011.09.10

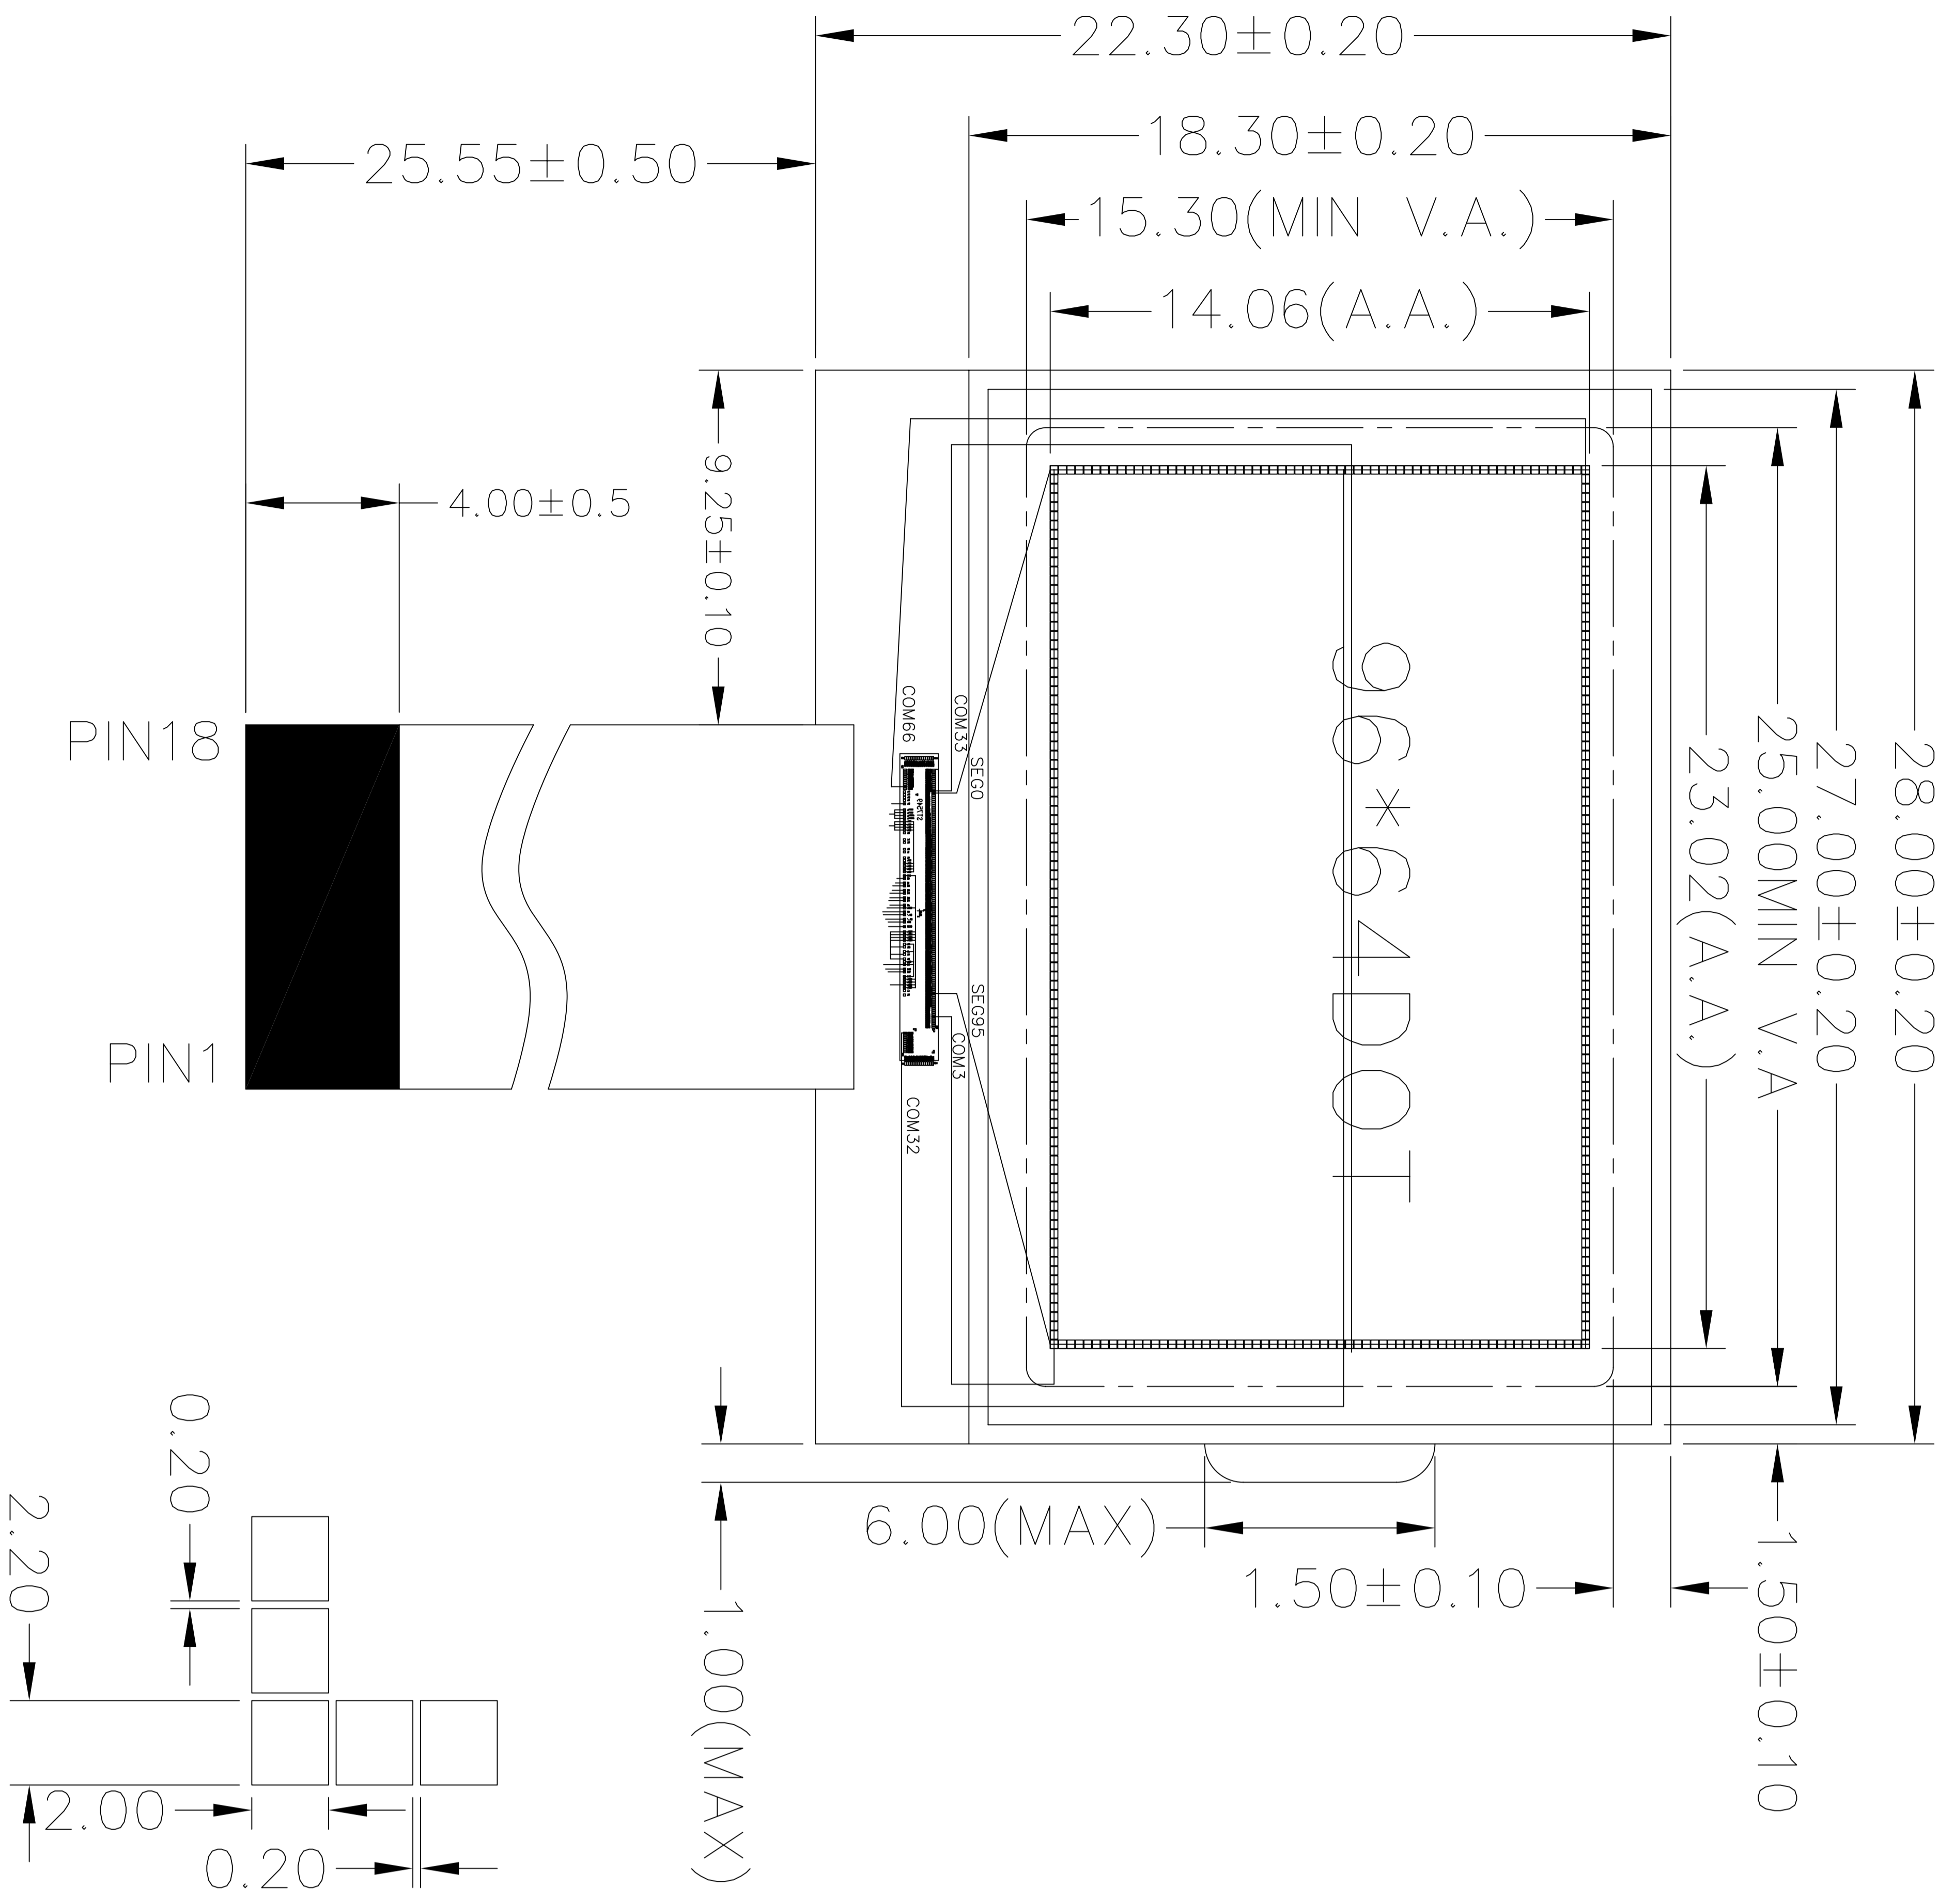

NO.	SYMBOL
1	VDD
2	PS1
3	PS2
4	RET
5	/CS
6	/WR
7	/RD
8	A0
9	DB7
10	DB6
11	DB5
12	DB4
13	DB3
14	DB2
15	DB1
16	DB0
17	VSS
18	VOUIT

Note

1. Display Type:FSTN
2. Polarizer Mode: Positive Transflective
3. Viewing Direction: 6 O'Clock
4. Drive Method:1/65Duty, 1/9Bias
5. Drive Voltage: VDD=3.0V
6. Operating Temp: -0°C TO 55°C
7. Storage Temp: -20°C TO 60°C
8. Drive Ic: ST7549
9. Unspecified Tolerance:±0.20

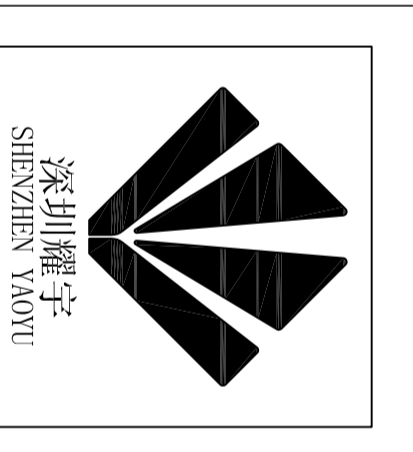

深圳市耀宇科技有限公司
SHENZHEN YAO YU TECHNOLOGY CO., LTD

图纸编号	YY-WD-END-001	设计	WEN/110910	单位	mm	公差	±0.2	页数	1/1	视角	
产品编号	YMF6-G9664BDDPFNNN	客户编号		版本	A1		±5.0°	比例	1:1		