

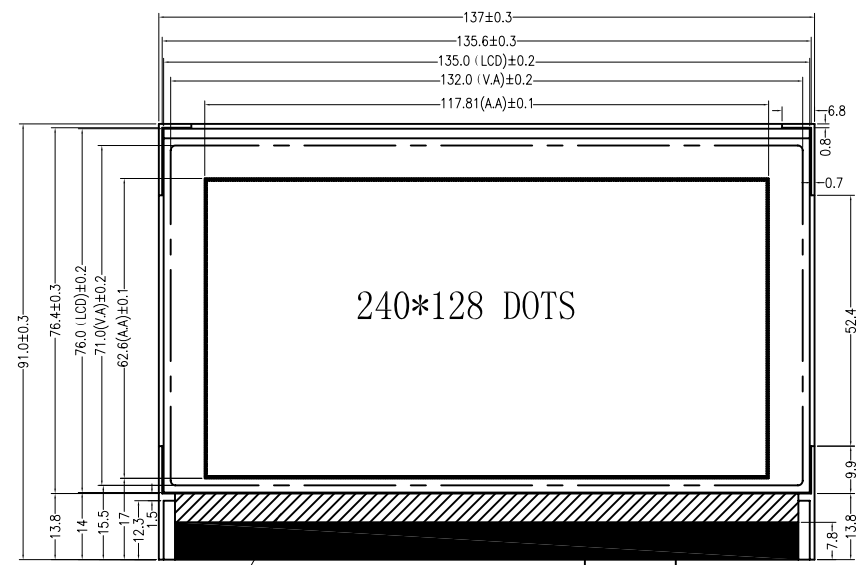




REV	REVISION RECORD	APPROVED
△	First Issue	

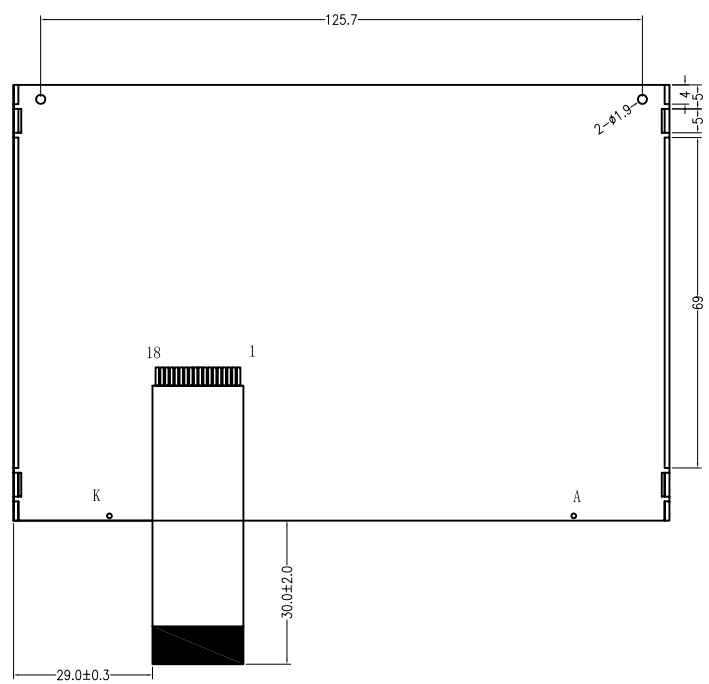


Stiffener Contact Side

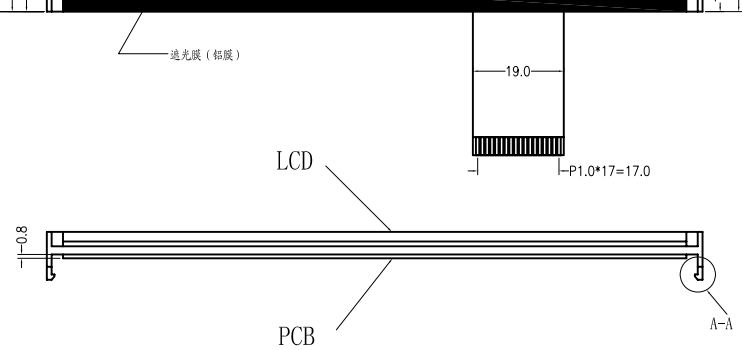

- NOTES:
1. Display type:STN/Yellow-Green
  2. Viewing direction:12 O' CLOCK
  3. Drive method:1/128DUTY 1/12BIAS
  4. Polarizer mode:Transflective/Positive
  5. LCD drive voltage:15.0V
  6. Operation temperature:-25° C~+80° C
  7. Storage temperature:-35° C~+90° C
  8. Driver/Controller IC:UC1608FB
  9. Backlight power supply voltage:5.0V
  10. VDD:3.0V
  11. Backlight :LED/Side White
  12. ROHS must be complied



A-A



SCALE:10/1

PIN NO.	1	2	3	4	5	6	7-14	15	16	17	18
NAME	VSS	VDD	VO	A0	/RD	/WR	DO-D7	/CS	/RST	A	K

		深圳市耀宇科技有限公司 SHENZHEN YAO YU TECHNOLOGY CO., LTD		PART NAME: YMKST-G240128U-1UYSWZN																															
General Tolerance: #		VERSION: A		DATE: 2011.08.06																															
<table border="1"> <tr><th>尺寸</th><th>1</th><th>2</th><th>3</th><th>4</th></tr> <tr><td>0-5</td><td>0.05</td><td>0.1</td><td>0.1</td><td>0.2</td></tr> <tr><td>5-10</td><td>0.05</td><td>0.1</td><td>0.1</td><td>0.2</td></tr> <tr><td>10-50</td><td>0.05</td><td>0.1</td><td>0.2</td><td>0.3</td></tr> <tr><td>50-100</td><td>0.1</td><td>0.2</td><td>0.3</td><td>0.5</td></tr> <tr><td>100-150</td><td>0.1</td><td>0.2</td><td>0.5</td><td>0.8</td></tr> </table>		尺寸	1	2	3	4	0-5	0.05	0.1	0.1	0.2	5-10	0.05	0.1	0.1	0.2	10-50	0.05	0.1	0.2	0.3	50-100	0.1	0.2	0.3	0.5	100-150	0.1	0.2	0.5	0.8	SCALE: 1/1		UNIT: mm	
尺寸	1	2	3	4																															
0-5	0.05	0.1	0.1	0.2																															
5-10	0.05	0.1	0.1	0.2																															
10-50	0.05	0.1	0.2	0.3																															
50-100	0.1	0.2	0.3	0.5																															
100-150	0.1	0.2	0.5	0.8																															
APPROVED:		CHECKED:		DRAWN:																															
FILE NAME:		LGF																																	