



DESCRIPTION	DATE
XXXXXXXX	19-01-08

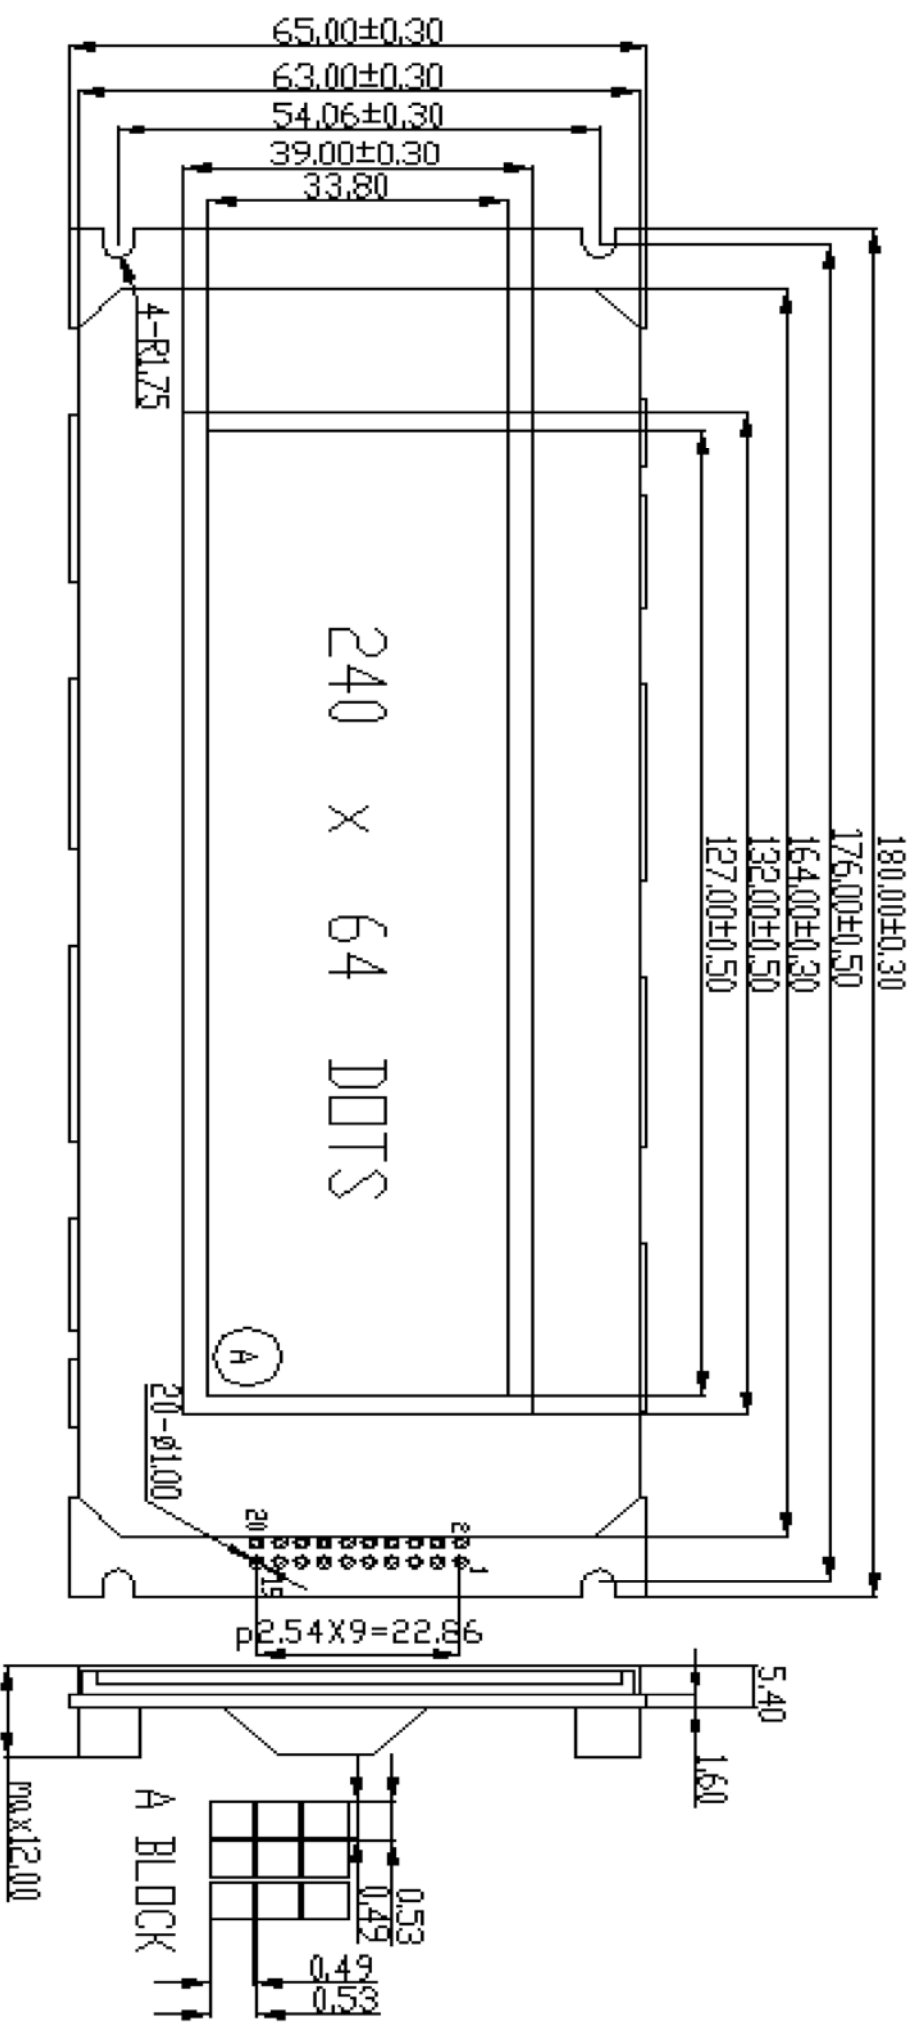

NOTES:

- 1.DISPLAY TYPE: STN/YELLOW-GREEN
- 2.VIEWING ANGLE: 6:00
- 3.POLARIZER MODE: TRANSPARENT/POSITIVE
- 4.OPERATING TEMP: -20°C~~+70°C
- 5.STORAGE TEMP: -30°C~~+80°C
- 6.LOGIC VOLTAGE: VDD=5.0V
- 7.LCD DRIVER VOLTAGE: ---
- 8.DRIVE METHOD: 1/240DUTY,1/9BIAS
- 9.DRIVE IC: T6963C
- 10.BACKLIGHT TYPE: LED/YELLOW-GREEN

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
FG	VSS	VDD	V0	/WR	/RD	CE	C/D	NC	RST	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	FS	V0UT

 深 圳 市 耀 宇 科 技 有 限 公 司 SHENZHEN YAO YU TECHNOLOGY CO., LTD.					
DRAW NO.	YMS-P-G24064ADYLYSD	DRAWN	ME CHECKED	EE CHECKED	APPROVED
UNIT:mm	PAGE:1/1	VER: A	SCALE:1/1		
TOLERANCES UNLESS:					